

8

7

6

5

4

3

2

1

F


E

D

C

B

A

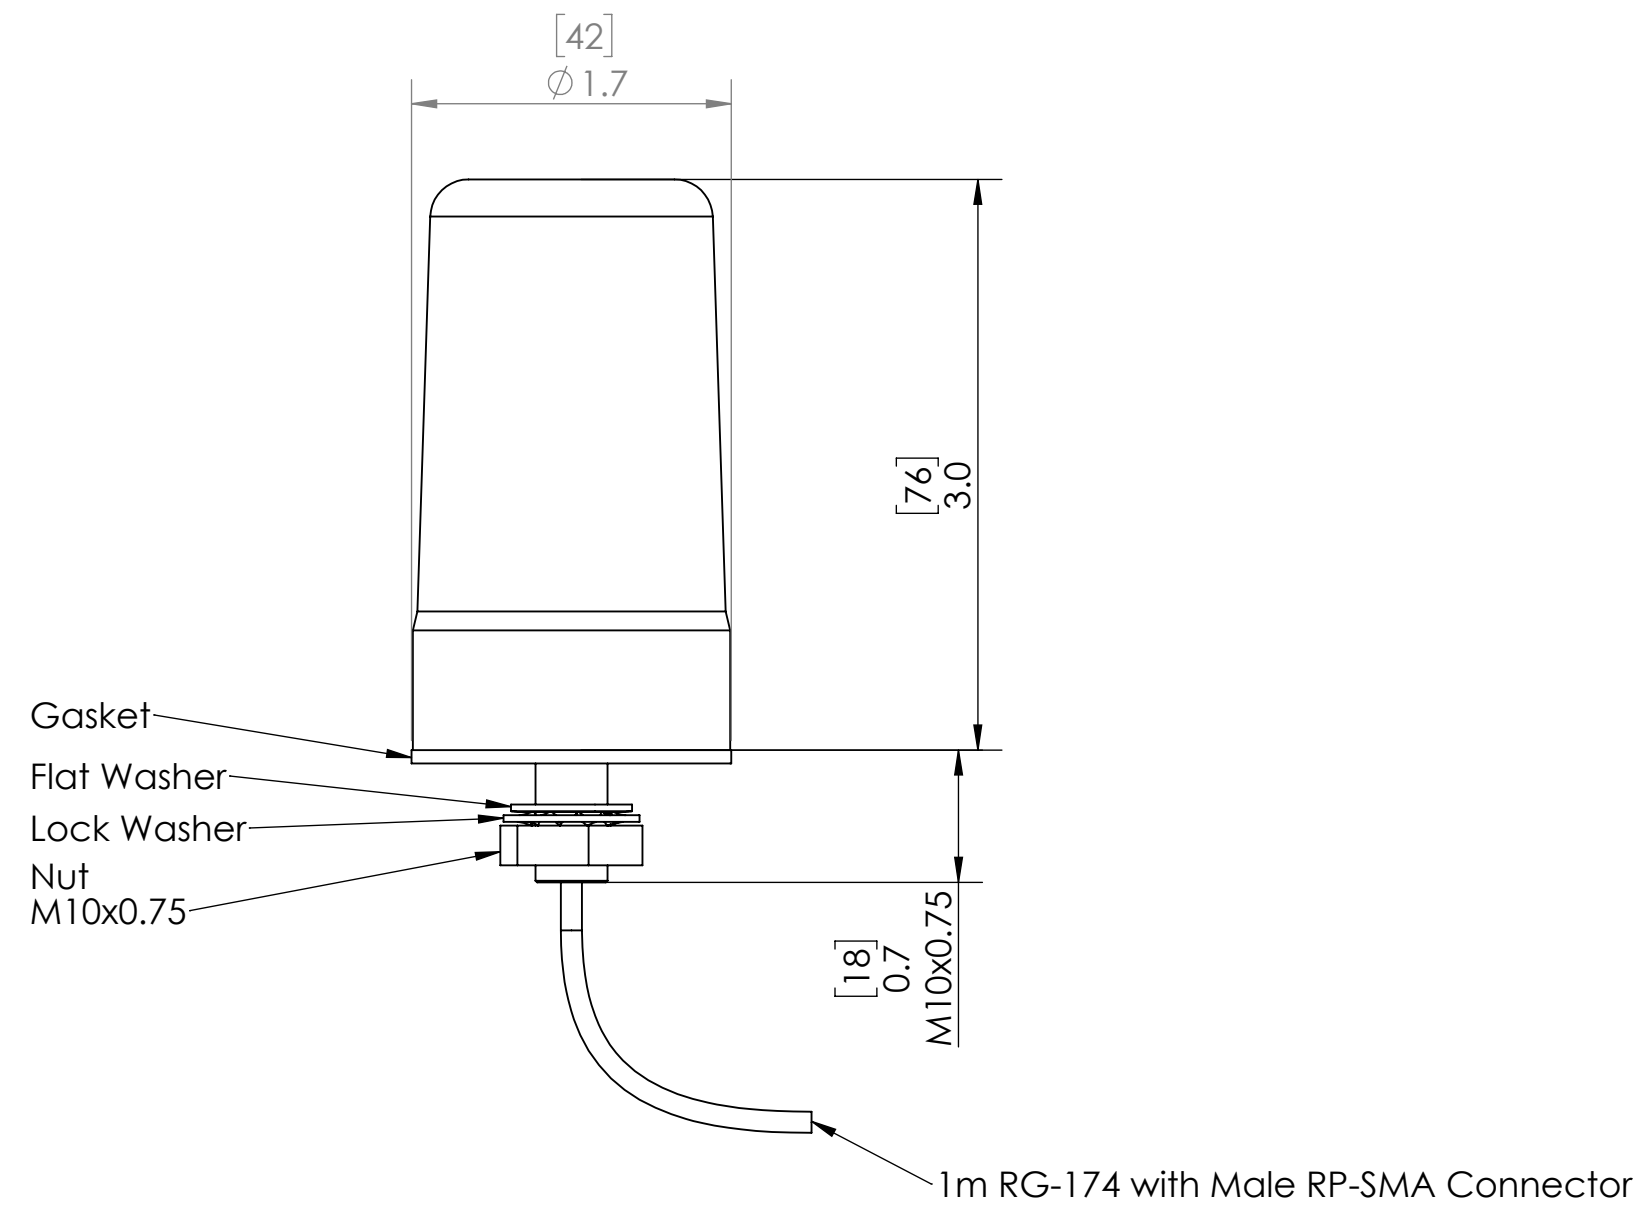

Order Code: Ext-Ant

	Specification
Frequency	902~928MHz
Gain	5.8dBi
V.S.W.R.	< 2.7
Impedance	50 Ohm
Cable, Connector	RG-174, 1m,RP-SMA, Male
Polarization	Linear, Vertical
Dimension	42(Dia.) x 75.6 (H)
Ingress Rating	IPX7
Operation Temperature	-40 to +80°C
Storage Temperature	-40 to +85°C

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	SignalFire Telemetry	
DIMENSIONS ARE IN INCHES		DRAWN	S.BLODGETT		5/1/2019
TOLERANCES:		CHECKED			
FRACTIONAL $\pm 1/64$		ENG APPR.			
ANGULAR: MACH. $\pm 1/2^\circ$		MFG APPR.			
TWO PLACE DECIMAL $\pm .01$		Q.A.			
THREE PLACE DECIMAL $\pm .005$		COMMENTS:			
INTERPRET GEOMETRIC TOLERANCING PER:					
MATERIAL					
FINISH					
DO NOT SCALE DRAWING					

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SIGNALFIRE TELEMETRY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SIGNALFIRE TELEMETRY IS PROHIBITED.

TITLE: Mechanical Drawing, Ext-Ant	
DWG. NO. 965-0058-01	REV A
SCALE 1:1	SHEET 1 OF 1